

### Features

- Output Current of 1A
- Output transistor safe area protection
- No external components
- Package: TO252


### General Description

UCB78MXX is three-terminal positive regulators. One of these regulators can deliver up to 1A of output current. When used as a replacement for a

Zener diode-resistor Combination, an effective improvement in output impedance can be obtained, together with lower quiescent current.


### Pin Configuration

TO252 (Top View)



| PIN NO. | PIN NAME | FUNCTION           |
|---------|----------|--------------------|
| 1       | VIN      | Input voltage pin  |
| 2       | GND      | Ground pin         |
| 3       | VOUT     | Output voltage pin |

**Block Diagram**

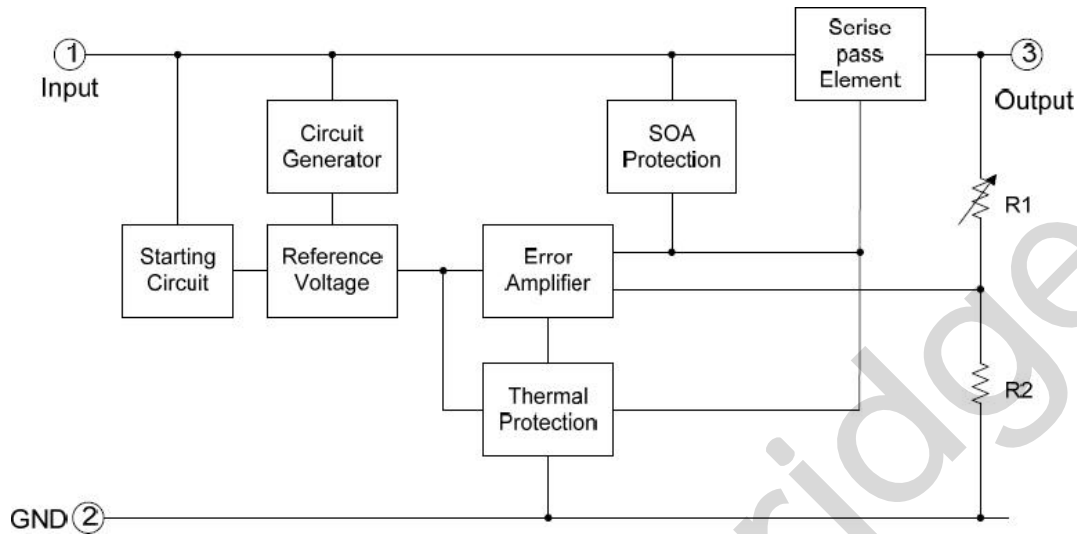

**Absolute Maximum Ratings ( Ta=25°C )**

| Parameter                       | Rating                | Unit |
|---------------------------------|-----------------------|------|
| Input supply voltage: VIN       | 35                    | V    |
| MAX. Output current:Iout        | 1000                  | mA   |
| MAX Power:Pmax                  | 0.35                  | W    |
| Maximum junction temperature:Tj | -25~125               | °C   |
| Storage temperature:Tstr        | -55~125               | °C   |
| Soldering temperature and time  | +260(Recommended 10S) | °C   |

Note: The absolute maximum ratings are rated values exceeding which the product could suffer physical damage. These values must therefore not be exceeded under any conditions.

### Electrical Characteristics





(C<sub>in</sub>=0.33uF, C<sub>o</sub>=0.1uF, 0≤T<sub>j</sub>≤125°C, unless otherwise noted)

| Parameter                | Symbol           | Conditions   | Min.                  | Typ.             | Max.                  | Unit |
|--------------------------|------------------|--|-----------------------|------------------|-----------------------|------|
| Output Voltage           | V <sub>out</sub> | I <sub>o</sub> =40mA, V <sub>IN</sub> =10V           | 0.964v <sub>out</sub> | v <sub>out</sub> | 1.036v <sub>out</sub> | V    |
|                          |                  | I <sub>o</sub> =1mA~40mA<br>V <sub>IN</sub> =7V~18V  | 0.96v <sub>out</sub>  | v <sub>out</sub> | 1.04v <sub>out</sub>  |      |
|                          |                  | I <sub>o</sub> =10mA<br>V <sub>IN</sub> =10V         | 0.95v <sub>out</sub>  | v <sub>out</sub> | 1.05v <sub>out</sub>  |      |
| Line Regulation          | LNR              | V <sub>IN</sub> =7V~18V, I <sub>o</sub> =40mA        | -150                  | -                | 150                   | mV   |
|                          |                  | V <sub>IN</sub> =8V~18V, I <sub>o</sub> =40mA        | -100                  | -                | 100                   |      |
| Load Regulation          | LDR              | V <sub>IN</sub> =10V, I <sub>o</sub> =1mA~100mA      | -60                   | -                | 60                    | mV   |
|                          |                  | V <sub>IN</sub> =10V, I <sub>o</sub> =1mA~40mA       | -30                   | -                | 30                    |      |
| Dropout Voltage          | V <sub>DIF</sub> | T <sub>j</sub> =25°C, I <sub>o</sub> =500mA          | -                     | 1.7              | -                     | V    |
| Quiescent Current        | I <sub>q</sub>   | V <sub>IN</sub> =10V                                 | -                     | 1.5              | --                    | mA   |
| Quiescent Current Change | ΔI <sub>q</sub>  | V <sub>IN</sub> =8V~18V, I <sub>o</sub> =40mA        | -1.5                  | -                | 1.5                   | mA   |
|                          |                  | V <sub>IN</sub> =10V,<br>I <sub>O</sub> UT=1mA~40mA, | -0.1                  | -                | 0.1                   |      |

LNR: Line Regulation. The change in output voltage for a change in the input voltage. The measurement is made under conditions of low dissipation or by using pulse techniques such that the average chip temperature is not significantly affected.

LDR: Load Regulation. The change in output voltage for a change in load current at constant chip temperature.


Typical Performance Characteristics

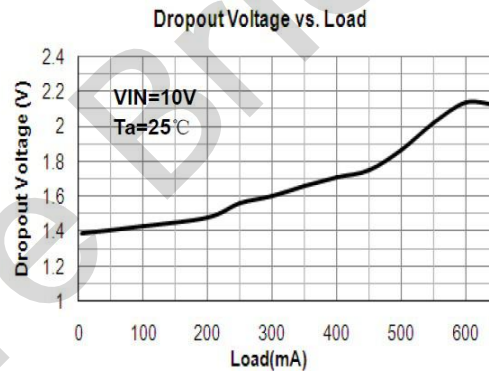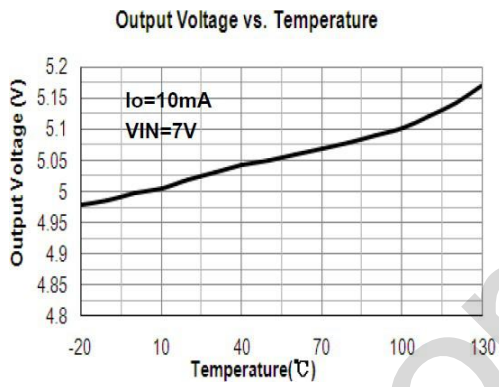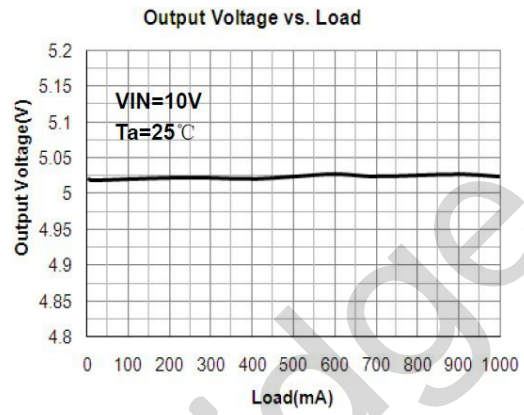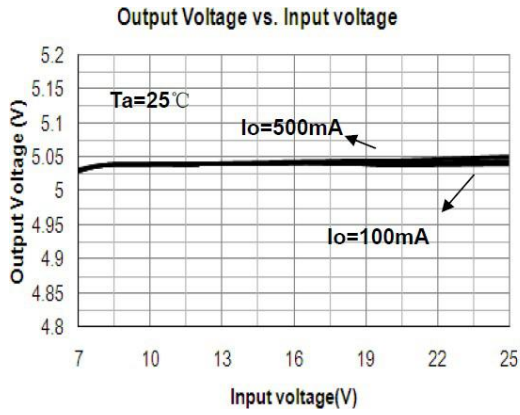

**Operation Description**

UCB78MXX is three-terminal positive regulators. One of these regulators can deliver up to 1A of output current. In many low current applications, compensation capacitors are not required. However, it is recommended that the regulator input be bypassed with a capacitor if the regulator is connected to the power supply filter with long wire lengths, or if the output load capacitance is large. An input bypass capacitor should be selected to provide good high frequency characteristics to insure stable operation under all load conditions. A 0.33μF or larger tantalum, or other capacitor having low internal impedance at high frequencies should be chosen. The bypass capacitor should be mounted with the shortest possible leads directly across the regulator's input terminals. Normally good construction techniques should be used to minimize ground loops and lead resistance drops since the regulator has no external sense lead.


**Typical Application**

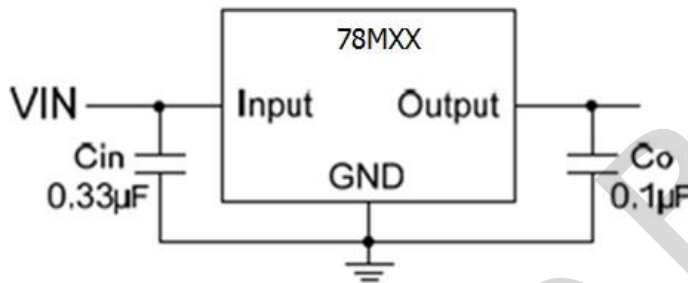

**Fig.1 Fixed Output Regulator**

A common ground is required between the input and the output voltages. The input voltage must remain typically 2.0 V above the output voltage even during the low point on the input ripple voltage.

- Cin is required if regulator is located an appreciable distance from power supply filter.
- Co is not needed for stability; however, it does improve transient response.

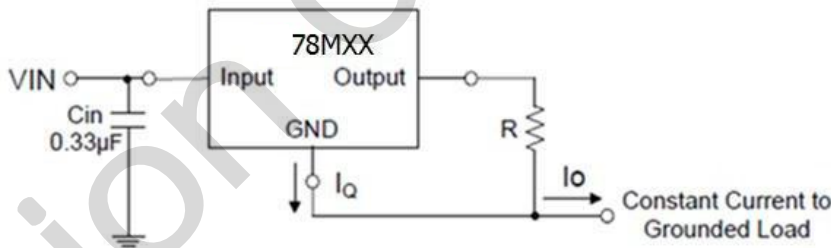

**Fig.2 Constant Current Regulator**


The UCB78MXX regulator can also be used as a current source when connected as Fig.2. In order to minimize dissipation the UCB78XX is chosen in this application. Resistor R determines the current as

follows:

$$I_o = \frac{5V}{R} + I_q$$

Package Information

TO-252-2L PACKAGE OUTLINE DIMENSIONS

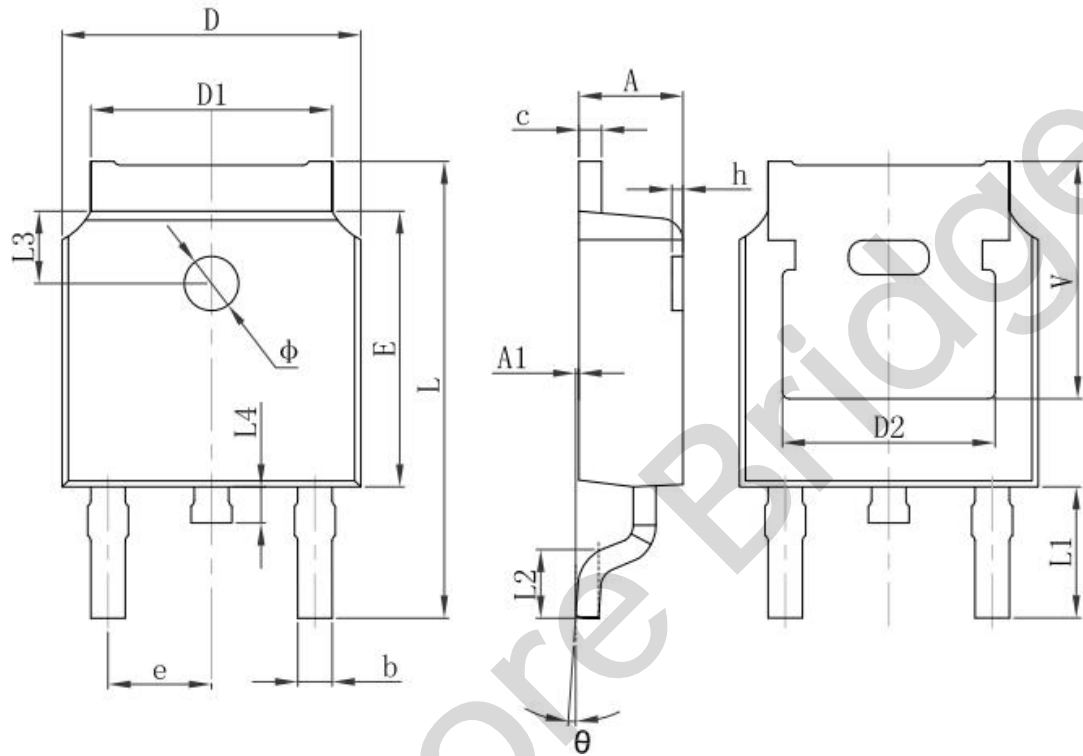

| Symbol | Dimensions In Millimeters |        | Dimensions In Inches |       |
|--------|---------------------------|--------|----------------------|-------|
|        | Min.                      | Max.   | Min.                 | Max.  |
| A      | 2.200                     | 2.400  | 0.087                | 0.094 |
| A1     | 0.000                     | 0.127  | 0.000                | 0.005 |
| b      | 0.660                     | 0.860  | 0.026                | 0.034 |
| c      | 0.460                     | 0.580  | 0.018                | 0.023 |
| D      | 6.500                     | 6.700  | 0.256                | 0.264 |
| D1     | 5.100                     | 5.460  | 0.201                | 0.215 |
| D2     | 4.830 REF.                |        | 0.190 REF.           |       |
| E      | 6.000                     | 6.200  | 0.236                | 0.244 |
| e      | 2.186                     | 2.386  | 0.086                | 0.094 |
| L      | 9.800                     | 10.400 | 0.386                | 0.409 |
| L1     | 2.900 REF.                |        | 0.114 REF.           |       |
| L2     | 1.400                     | 1.700  | 0.055                | 0.067 |
| L3     | 1.600 REF.                |        | 0.063 REF.           |       |
| L4     | 0.600                     | 1.000  | 0.024                | 0.039 |
| Φ      | 1.100                     | 1.300  | 0.043                | 0.051 |
| θ      | 0°                        | 8°     | 0°                   | 8°    |
| h      | 0.000                     | 0.300  | 0.000                | 0.012 |
| V      | 5.350 REF.                |        | 0.211 REF.           |       |