



# Solid Polymer Electrochemical Gas Sensing Technology

ES7-NO-1-BV-01

Nitric Oxide Gas Sensor  
Datasheet

## Easy Gas Sensor

# ES7-NO-1-BV Nitric Oxide Gas



## » Part Number

01-ES7-NO-1-BV-01

## » Features

- 👉 Detects with high selectivity a wide variety of gases
- 👉 Long lifetime > 3 years
- 👉 No-poisoning
- 👉 Typical warm-up time in seconds
- 👉 Fast response time
- 👉 nA power consumption
- 👉 Linear output
- 👉 No zero line drift
- 👉 Better signal to noise ratio
- 👉 Wide temperature range of -40 °C to +55 °C
- 👉 Excellent sensitivity at low temperatures
- 👉 No leakage
- 👉 Small size
- 👉 RoHS compliant

## » Typical Applications

- 👉 Medical and Health Breath Testing
- 👉 Environmental and Laboratory-Grade Analytical Applications



## » Technical Specifications

### Performance

Sensitivity	70 nA/ppm $\pm$ 20 nA/ppm
Zero Current	20 nA $\pm$ 50 nA
Range	0-1 ppm
Maximum Overload	5 ppm
Resolution (16Bit ADC)	0.003 ppm (3 ppb)
Response Time	$T_{50} < 5$ s, $T_{90} < 10$ s
Repeatability	1 %
Linearity	Linear

### Environment

Operating Temperature Range	-40 °C to +55 °C
Operating Humidity Range	15-95% RH non-condensing
Operating Pressure Range	800 to 1200 hPa
Storage Temperature	0 °C to 20 °C (Optimum temp. 4 °C to 6 °C)

### Operation

Operating Principle	Amperometric, 3-electrode
Bias Voltage	+300 mV
Recommended Load Resistor	100 Ω
Warm-Up Time	< 24 h (+300 mV bias voltage)

### Lifetime


Long-Term Drift *	< 5 %/year
Expected Lifetime	> 3 years
Zero Drift in Clean Air	< 10 ppb
Storage Life	36 months
Warranty	12 months

\*Note: Long-Term Drift may vary depending on storage conditions and usage.


### Housing

Housing Material	ABS
Weight	7.8 g


## » Dimensions ( Unit: mm )



Top

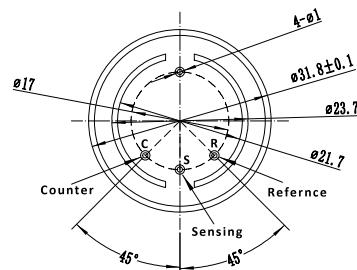

Bottom

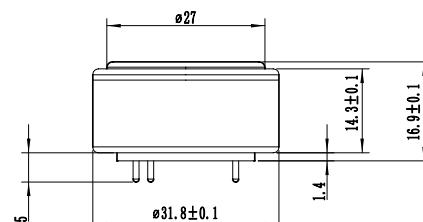

Side

## » Cross Sensitivity

Gas	Formula	Test Concentration	Sensor Reading
Nitric Oxide	NO	0.2 ppm	0.2 ppm
Carbon Monoxide	CO	10 ppm	0.012 ppm
Hydrogen	H <sub>2</sub>	10 ppm	0.004 ppm
Hydrogen Sulfide	H <sub>2</sub> S	5 ppm	0 ppm
Ammonia	NH <sub>3</sub>	10 ppm	0 ppm
Methyl Mercaptan	CH <sub>3</sub> S	5 ppm	0 ppm
Nitrogen Dioxide	NO <sub>2</sub>	0.5 ppm	0.005 ppm
Acetone	C <sub>3</sub> H <sub>6</sub> O	10 ppm	0 ppm
Methane	CH <sub>4</sub>	5000 ppm	0 ppm
Carbon Dioxide	CO <sub>2</sub>	2000 ppm	0 ppm

### Note:

- 1) The above interference factors may vary due to different sensors and service life, please refer to the actual test results.
- 2) This table is not complete for all cross gases. Please contact us for other gases.
- 3) The above parameters are the test results at a temperature of 25 °C, a relative humidity of 50% RH and a normal pressure environment. The performance of the sensor varies under different environmental conditions. If you have any questions, please contact us.
- 4) The above cross interferences are represented by a low concentration of the gas.

## Disclaimer

The EC Sense performance data stated above is based on data obtained under test conditions using the EC Sense gas distribution system and AQS test software. In the interest of continuous product improvement, EC Sense reserves the right to change design features and specifications without notice. We are not responsible for any loss, injury or damage caused by this. EC Sense assumes no responsibility for any indirect loss, injury or damage resulting from the use of this document, the information contained therein or any omissions or errors herein. This document does not constitute an offer to sell. The data it contains are for informational purposes only and cannot be considered a guarantee. Any use of the given data must be evaluated and determined by the user to comply with federal, state and local laws and regulations. All specifications outlined are subject to change without notice.

## ⚠ Warning

EC Sense sensors are designed for use in a variety of environmental conditions. However, due to the principles and characteristics of solid polymer electrochemical sensors and to ensure normal use, users must strictly follow this article during storage, assembly and operation of the module. Avoid cleaning the sensors with alcohol, acetone or other strong solvents. General-purpose PCB circuit board application methods and illegal applications or violation of the application will not be covered by the warranty. Although our products are highly reliable, we recommend checking the module's response to the target gas prior to utilization to ensure on-site use. At the end of the product's service life, please do not discard any electronics in the domestic waste, instead follow the local governments electronic waste recycling regulations for disposal.



**Business Centre  
Europe and the rest of the world**

EC Sense GmbH  
Wangener Weg 3  
82069 Hohenstaufen, Germany  
Tel: +49(0)8178-99992-10 Fax: +49(0)8178-99992-11  
Email: [office@ecsense.com](mailto:office@ecsense.com)  
[www.ecsense.com](http://www.ecsense.com)

**Business Centre  
Asia**

Ningbo AQSystems Technology Co., Ltd.  
6 Building, Zhong Wu Technology Park No.228,  
Jin Gu North Road, Yinzhou District NingBo,  
Zhejiang Province, P.R. China Post Code: 315100  
Tel: +86(0)574 88097236, 88096372  
Email: [info@aqsystems.cn](mailto:info@aqsystems.cn)  
[www.ecsense.com](http://www.ecsense.com)