



泽诺动力科技



PRODUCT MANUALS
散热风机




PRODUCT MANUALS
加热器及温控器



PRODUCT MANUALS
风扇及过滤器

PRODUCT MANUALS **LED机柜灯选型手册**

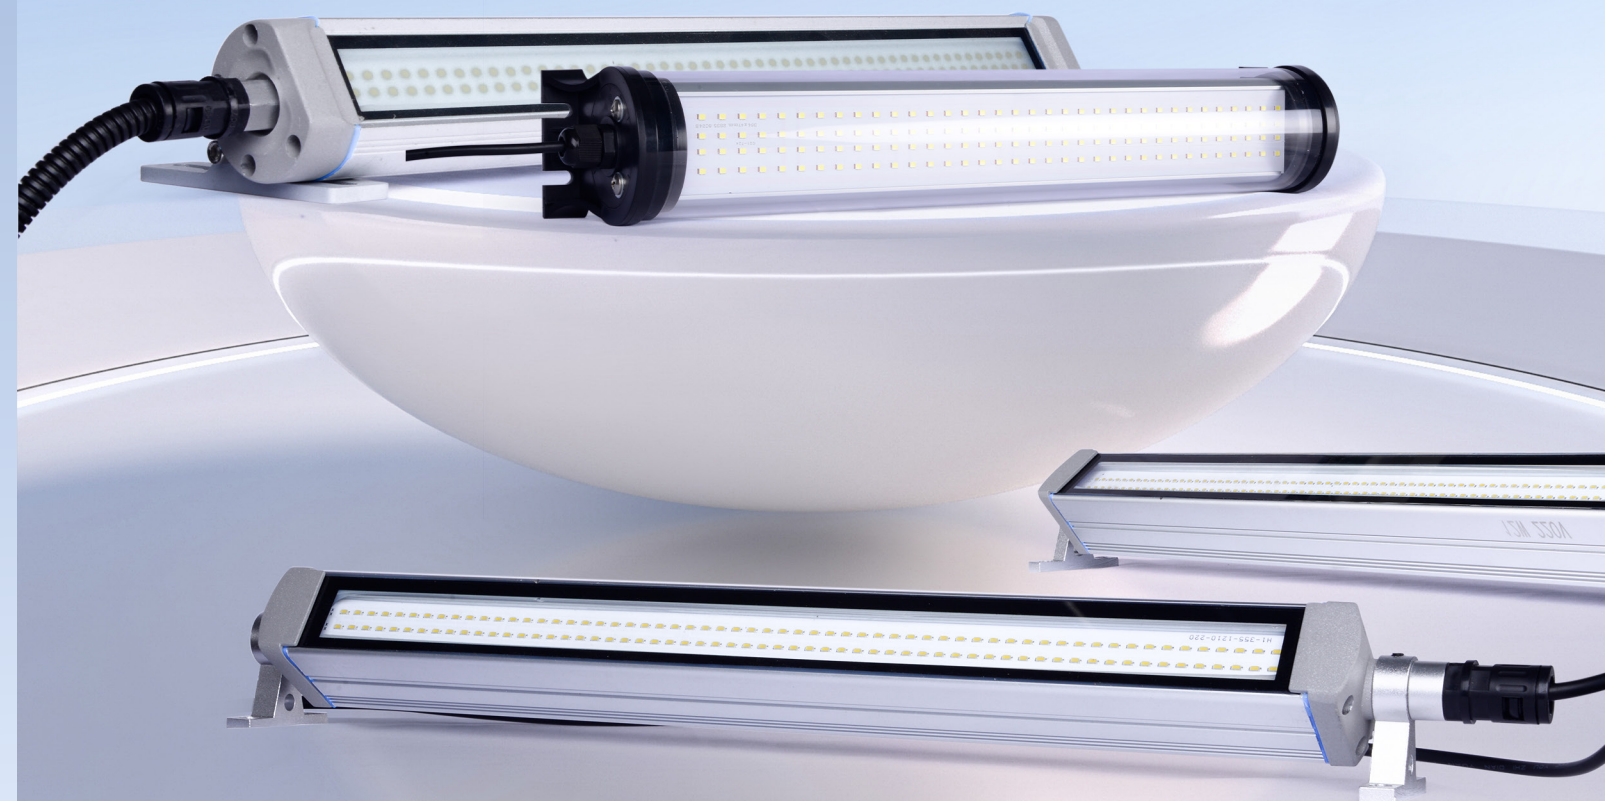

📍 苏州市吴中区胥口镇合丰路558号

☎ 159 6222 3467 / 180 1307 1198 (销售经理)

🌐 <http://www.jszndlkj.com/>



了解更多产品详情 请联系我们



了解更多产品详情 请查阅

COMPANY PROFILE

公司介绍

MAIN BUSINESS

01

苏州泽诺动力科技有限公司，是集研发、生产、销售、服务为一体的科技型企业。
公司以"高起点、高标准、高质量"为质量宗旨，致力于打造拥有专业的研发、成熟的工艺、先进的生产严格的检测的现代化企业。
公司主要以机柜环境为主导，生产销售散热风扇、防护网及通风过滤器系列、加热器及温控器系列、控制柜除湿器系列、机柜灯系列以及电控配套件等系列产品。

SUZHOU ZENUO POWER TECHNOLOGY CO.,LTD IS A TECHNOLOGY-BASED ENTERPRISE THAT INTEGRATES RESEARCH AND DEVELOPMENT, PRODUCTION, SALES, AND SERVICE.
THE COMPANY ADHERES TO THE QUALITY TENET OF "HIGH STARTING POINT, HIGH STANDARDS, AND HIGH QUALITY" AND IS COMMITTED TO BUILDING A MODERN ENTERPRISE WITH PROFESSIONAL RESEARCH AND DEVELOPMENT, MATURE PROCESSES, AND ADVANCED PRODUCTION AND STRICT TESTING.
THE COMPANY MAINLY FOCUSES ON CABINET ENVIRONMENT, PRODUCING AND SELLING COMPUTER FAN, PROTECTIVE SCREEN AND VENTILATION FILTER SERIES, HEATER AND TEMPERATURE CONTROLLER SERIES, CONTROL CABINET DEHUMIDIFIER SERIES, CABINET LAMP SERIES, ELECTRIC CONTROL ACCESSORIES AND OTHER SERIES OF PRODUCTS.

02

公司成立至今，一直奉行"坦诚、沟通、信任、合作、互惠、共赢"的经营宗旨，以良好的信誉和优质的产品赢得了广大客户的信赖和支持。面对问题我们将以积极的态度、严谨的分析、有效的改善，与新老客户起共同努力，为广大客户的兴旺发达作出新贡献，也使广大客户选用本公司的产品始终充满信心！

SINCE ITS ESTABLISHMENT, THE COMPANY HAS ALWAYS ADHERED TO THE BUSINESS PHILOSOPHY OF HONESTY, COMMUNICATION, TRUST, COOPERATION, MUTUAL BENEFIT, AND WIN-WIN, AND HAS WON THE TRUST AND SUPPORT OF CUSTOMERS WITH GOOD REPUTATION AND HIGH-QUALITY PRODUCTS. IN THE FACE OF PROBLEMS, WE WILL WORK TOGETHER WITH NEW AND OLD CUSTOMERS WITH A POSITIVE ATTITUDE, RIGOROUS ANALYSIS, AND EFFECTIVE IMPROVEMENT, MAKING NEW CONTRIBUTIONS TO THE PROSPERITY AND DEVELOPMENT OF OUR CUSTOMERS, AND ALSO MAKING THEM ALWAYS CONFIDENT IN CHOOSING OUR COMPANY'S PRODUCTS.

MAIN BUSINESS



科技公司



精益求精



专业精良



COMPANY PHILOSOPHY

经营理念

研发创新

研发理念：自主研发、勇于创新、可靠实用

精益求精

制造理念：精益生产、质量至上

持续发展

指导思想：优质的人才、专业的研发、先进的生产、严格的检测

服务至上

服务理念：坦诚、信任、合作、共赢

RETO INNOVATION
RESEARCH AND DEVELOPMENT PHILOSOPHY: INDEPENDENT RESEARCH AND DEVELOPMENT, COURAGE TO INNOVATE, RELIABLE AND PRACTICAL

STRIVING FOR EXCELLENCE
MANUFACTURING PHILOSOPHY: LEAN MANUFACTURING, QUALITY FIRST

SUSTAINED DEVELOPMENT
GUIDING IDEOLOGY: HIGH-QUALITY TALENTS, PROFESSIONAL RESEARCH AND DEVELOPMENT, ADVANCED PRODUCTION, AND STRICT TESTING

SERVICE FIRST
SERVICE PHILOSOPHY: HONESTY, TRUST, COOPERATION, AND WIN-WIN SITUATION

COMPANY CULTURE

企业文化

企业愿景：快乐工作，心中有梦，齐心协力，创造辉煌

企业使命：为员工提供机会、为客户创造价值、为社会承担责任

企业目标：创知名品牌，建优质企业

企业精神：诚信互勉共创鸿图

CORPORATE VISION: WORK HAPPILY, HAVE DREAMS IN YOUR HEART, WORK TOGETHER TO CREATE BRILLIANCE

CORPORATE MISSION: PROVIDING OPPORTUNITIES FOR EMPLOYEES, CREATING VALUE FOR CUSTOMERS, AND TAKING RESPONSIBILITY FOR SOCIETY

CORPORATE GOAL: TO CREATE A WELL-KNOWN BRAND AND BUILD A HIGH-QUALITY ENTERPRISE

CORPORATE SPIRIT: INTEGRITY, MUTUAL ENCOURAGEMENT, AND CREATING A GREAT FUTURE TOGETHER





可支持不同参数定制

Support customization of different parameters

PRODUCT CATALOG

产品目录

A系列

GENERAL SPECIFICATIONS

002

01

B系列

GENERAL SPECIFICATIONS

003

02

F系列

GENERAL SPECIFICATIONS

004

03

G系列

GENERAL SPECIFICATIONS

005

04

G-1系列


GENERAL SPECIFICATIONS

006

05

PRODUCT INTRODUCTION

机柜灯

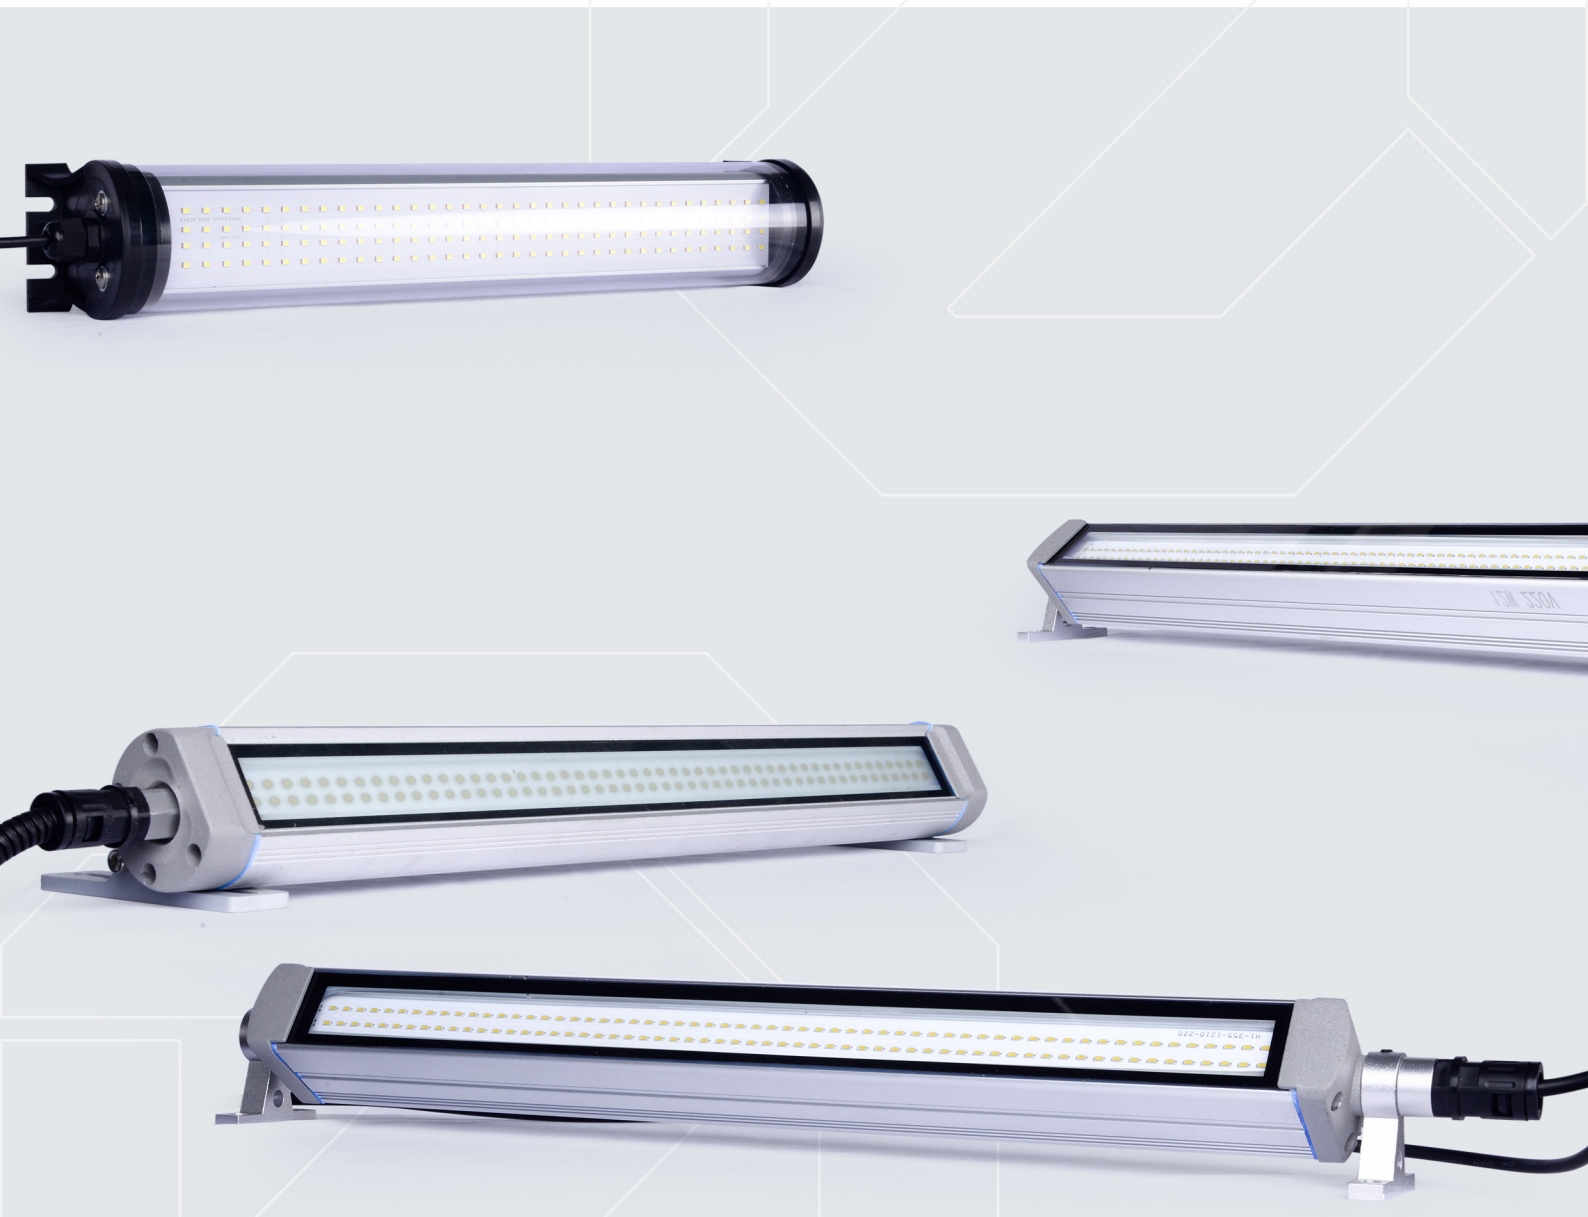


通用规范 / GENERAL SPECIFICATIONS

A系列

认证: RoHS,CE
功率: 6/10/12/16/20/28/30/40W
电压: 24~36V,110~220V
色温: 正白光: 6000~6500K (标准) ; 可定制3000~4500K
光效: 100~120LM/W
显指: >80


寿命: 50,000Hrs
发光角度: 120°
表面温度: <60° C
防护等级: IP68
产品材质: 铝合金+钢化玻璃
线材长度: 0.8米

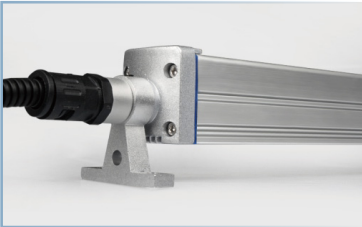

产品外观图 / PRODUCT APPEARANCE



产品尺寸图 / DIMENSIONS DRAWING

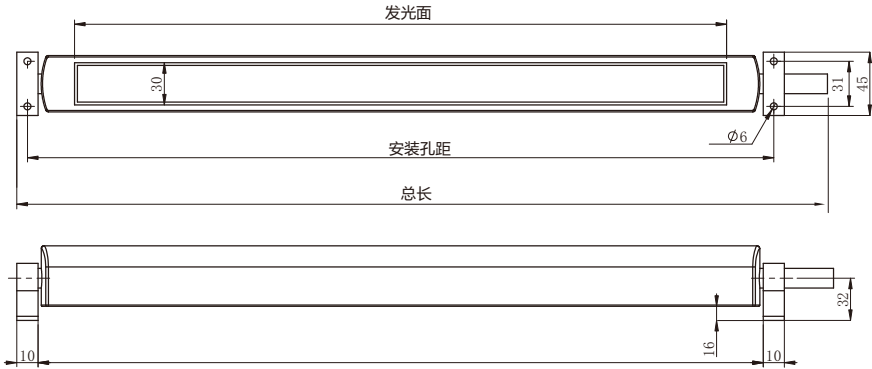

产品规格 / TECHNICAL DATA

型号	功率/电压	长*宽*高	发光面	安装孔距
FV-JDA-200-24V	6W/24V	280*45*53	180*30	233*31 (Φ6)
FV-JDA-300-24V	10W/24V	380*45*53	280*30	333*31 (Φ6)
FV-JDA-400-24V	12W/24V	445*45*53	345*30	398*31 (Φ6)
FV-JDA-500-24V	16W/24V	580*45*53	480*30	533*31 (Φ6)
FV-JDA-600-24V	20W/24V	680*45*53	580*30	633*31 (Φ6)
FV-JDA-800-24V	28W/24V	850*45*53	750*30	803*31 (Φ6)
FV-JDA-900-24V	30W/24V	980*45*53	880*30	933*31 (Φ6)
FV-JDA-1200-24V	40W/24V	1250*45*53	1150*30	1203*31 (Φ6)
FV-JDA-200-220V	6W/220V	280*45*53	180*30	233*31 (Φ6)
FV-JDA-300-220V	10W/220V	380*45*53	280*30	333*31 (Φ6)
FV-JDA-400-220V	12W/220V	445*45*53	345*30	398*31 (Φ6)
FV-JDA-500-220V	16W/220V	580*45*53	480*30	533*31 (Φ6)
FV-JDA-600-220V	20W/220V	680*45*53	580*30	633*31 (Φ6)
FV-JDA-800-220V	28W/220V	850*45*53	750*30	803*31 (Φ6)
FV-JDA-900-220V	30W/220V	980*45*53	880*30	933*31 (Φ6)
FV-JDA-1200-220V	40W/220V	1250*45*53	1150*30	1203*31 (Φ6)


(注: 尺寸单位: mm)

通用规范 / GENERAL SPECIFICATIONS

B系列

认证: RoHS,CE
功率: 6/10/12/16/20/28/30W
电压: 24~36V,110~220V
色温: 正白光: 6000~6500K (标准) ; 可定制3000~4500K
光效: 100~120LM/W
显指: >80


寿命: 50,000Hrs
发光角度: 120°
表面温度: <60° C
防护等级: IP67
产品材质: 铝合金+钢化玻璃
线材长度: 0.8米



产品外观图 / PRODUCT APPEARANCE



产品尺寸图 / DIMENSIONS DRAWING

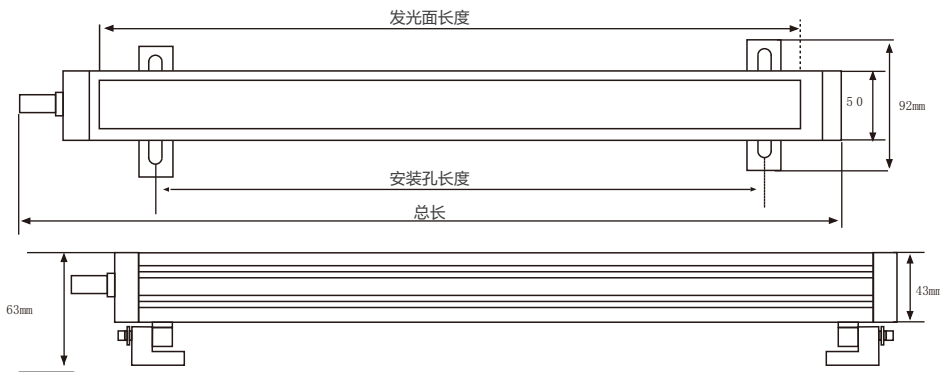

产品规格 / TECHNICAL DATA

型号	功率/电压	总长度	发光面	安装尺寸 (长度*宽度)	安装孔
FV-JDB-200-24V	6W/24V	270	183*30	50~180*40~75	Φ6
FV-JDB-300-24V	10W/24V	370	283*30	50~180*40~75	Φ6
FV-JDB-400-24V	12W/24V	470	383*30	50~280*40~75	Φ6
FV-JDB-500-24V	16W/24V	570	483*30	50~380*40~75	Φ6
FV-JDB-600-24V	20W/24V	640	583*30	50~480*40~75	Φ6
FV-JDB-200-220V	6W/220V	240	183*30	50~180*40~75	Φ6
FV-JDB-300-220V	10W/220V	340	283*30	50~180*40~75	Φ6
FV-JDB-400-220V	12W/220V	440	383*30	50~280*40~75	Φ6
FV-JDB-500-220V	16W/220V	540	483*30	50~380*40~75	Φ6
FV-JDB-600-220V	20W/220V	640	583*30	50~480*40~75	Φ6

(注: 尺寸单位: mm)

通用规范 / GENERAL SPECIFICATIONS


F系列

认证: RoHS,CE
功率: 10/12/15/20/25W
电压: 24~36V,110~220V
色温: 正白光: 6000~6500K (标准) ; 可定制3000~4500K
光效: 100~120LM/W
显指: >80


寿命: 50,000Hrs
发光角度: 120°
表面温度: <60° C
防护等级: IP67
产品材质: 铝合金+PC
线材长度: 0.8米



产品外观图 / PRODUCT APPEARANCE

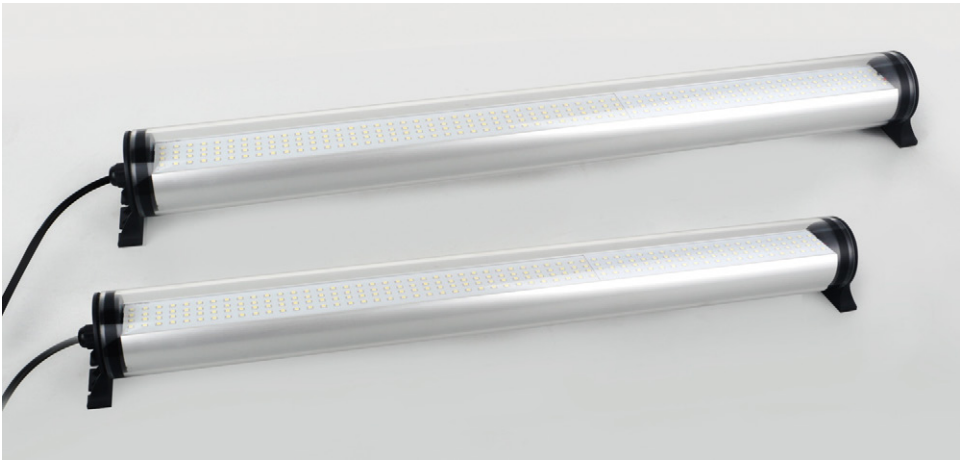

产品尺寸图 / DIMENSIONS DRAWING

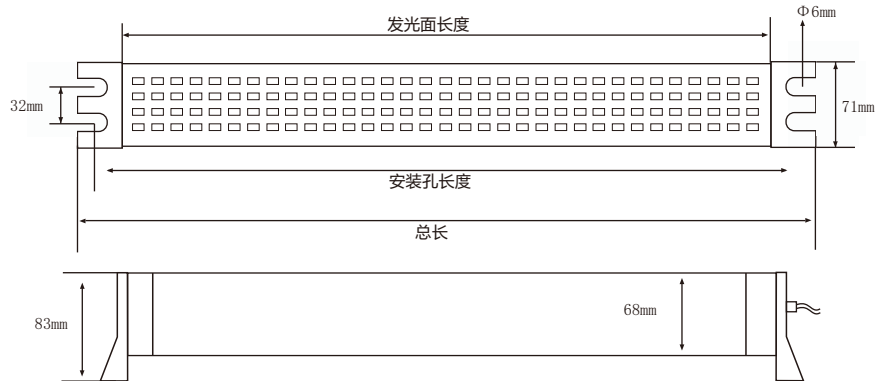

产品规格 / TECHNICAL DATA

型号	功率/电压	发光面长度	安装尺寸	总长度	安装孔
FV-JDF-300-24V	10W/24V	260	330*32	345	Φ6.6
FV-JDF-400-24V	12W/24V	430	430*32	445	Φ6.6
FV-JDF-500-24V	15W/24V	460	530*32	545	Φ6.6
FV-JDF-600-24V	20W/24 V	560	630*32	645	Φ6.6
FV-JDF-700-24V	25W/24V	660	730*32	745	Φ6.6
FV-JDF-300-220V	10W/220V	260	330*32	345	Φ6.6
FV-JDF-400-220V	12W/220V	430	430*32	445	Φ6.6
FV-JDF-500-220V	15W/220V	460	530*32	545	Φ6.6
FV-JDF-600-220V	20W/220V	560	630*32	645	Φ6.6
FV-JDF-700-220V	25W/220V	660	730*32	745	Φ6.6

(注: 尺寸单位: mm / 其它长度咨询厂家)

通用规范 / GENERAL SPECIFICATIONS

G系列

认证: RoHS,CE
功率: 6/10/12/15/20/30W
电压: 24~36V,110~220V
色温: 正白光: 6000~6500K (标准) ; 可定制3000~4500K
光效: 100~120LM/W
显指: >80


寿命: 50,000Hrs
发光角度: 120°
表面温度: <50° C
防护等级: IP66
产品材质: 铝合金+钢化玻璃
线材长度: 0.8米



产品外观图 / PRODUCT APPEARANCE



产品尺寸图 / DIMENSIONS DRAWING

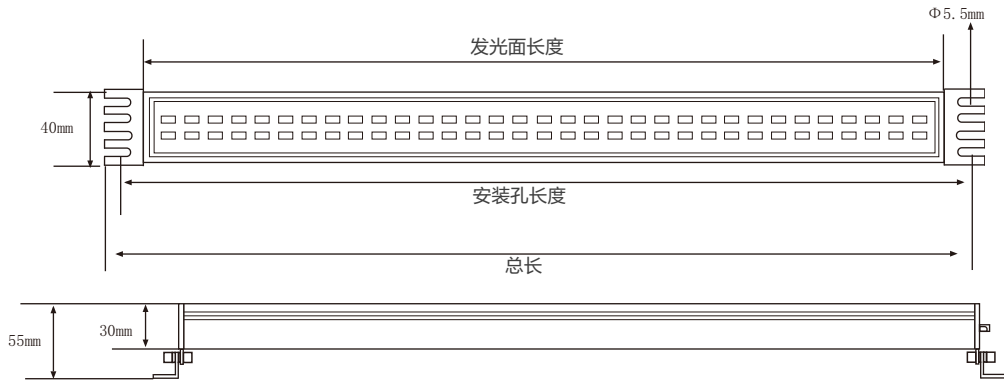

产品规格 / TECHNICAL DATA

型号	功率/电压	总长度	发光面	安装尺寸 (长度*宽度)	安装孔
FV-JDG-200-24V	6W/24V	248	195*36	233*10.5/20.5/31.5	Φ5.5
FV-JDG-300-24V	10W/24V	348	295*36	333*10.5/20.5/31.5	Φ5.5
FV-JDG-400-24V	12W/24V	448	395*36	433*10.5/20.5/31.5	Φ5.5
FV-JDG-500-24V	16W/24V	548	495*36	533*10.5/20.5/31.5	Φ5.5
FV-JDG-600-24V	20W/24V	648	595*36	633*10.5/20.5/31.5	Φ5.5
FV-JDG-900-24V	30W/24V	948	895*36	933*10.5/20.5/31.5	Φ5.5
FV-JDG-200-220V	6W/220V	248	195*36	233*10.5/20.5/31.5	Φ5.5
FV-JDG-300-220V	10W/220V	348	295*36	333*10.5/20.5/31.5	Φ5.5
FV-JDG-400-220V	12W/220V	448	395*36	433*10.5/20.5/31.5	Φ5.5
FV-JDG-500-220V	16W/220V	548	495*36	533*10.5/20.5/31.5	Φ5.5
FV-JDG-600-220V	20W/220V	648	595*36	633*10.5/20.5/31.5	Φ5.5
FV-JDG-900-220V	30W/220V	948	895*36	933*10.5/20.5/31.5	Φ5.5


(注: 尺寸单位: mm)

通用规范 / GENERAL SPECIFICATIONS


G-1系列

功率: 6/10/12/16/20/30W
电压: 24~36V,110~220V
色温: 正白光: 6000~6500K (标准) ; 可定制3000~4500K
光效: 100~120LM/W
显指: >80
寿命: 50,000Hrs


发光角度: 120°
表面温度: <60° C
防护等级: IP66
产品材质: 铝合金+钢化玻璃
线材长度: 0.8米



产品外观图 / PRODUCT APPEARANCE

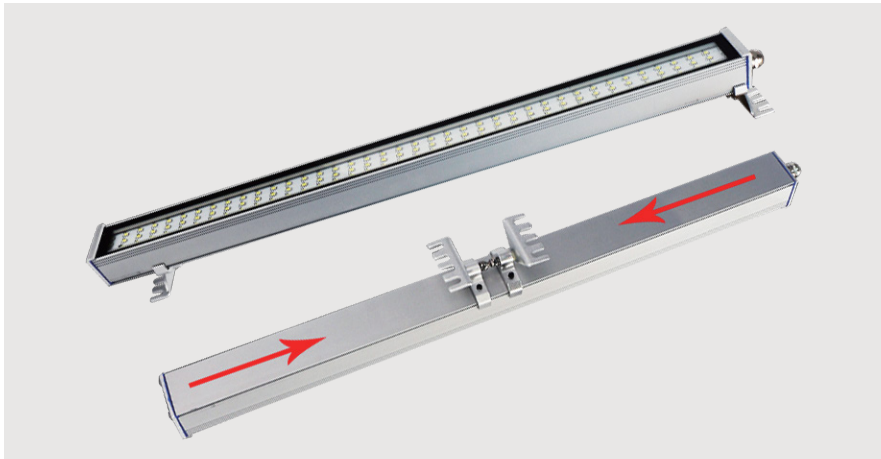

产品尺寸图 / DIMENSIONS DRAWING

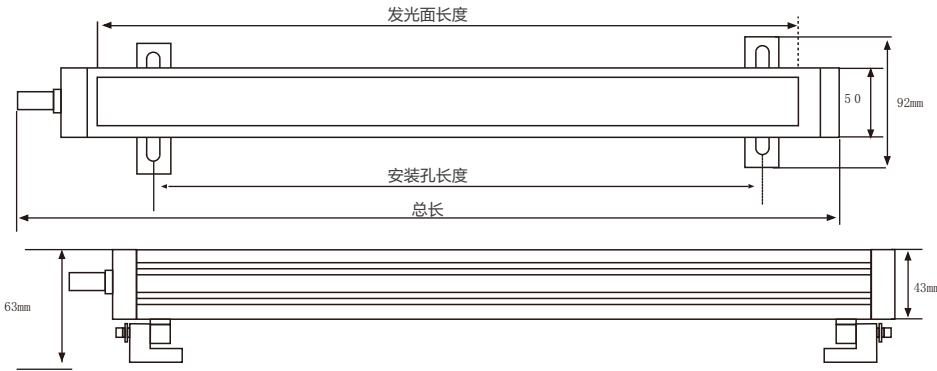

产品规格 / TECHNICAL DATA

型号	功率/电压	总长度	发光面	安装尺寸 (长度*宽度)	安装孔
FV-JDG-1-200-24V	6W/24V	210	195*36	长: 可变距, 宽: 4孔可选	Φ5.5
FV-JDG-1-300-24V	10W/24V	310	295*36	长: 可变距, 宽: 4孔可选	Φ5.5
FV-JDG-1-300-24V	12W/24V	410	395*36	长: 可变距, 宽: 4孔可选	Φ5.5
FV-JDG-1-500-24V	16W/24V	510	495*36	长: 可变距, 宽: 4孔可选	Φ5.5
FV-JDG-1-600-24V	20W/24V	610	595*36	长: 可变距, 宽: 4孔可选	Φ5.5
FV-JDG-1-900-24V	30W/24V	910	895*36	长: 可变距, 宽: 4孔可选	Φ5.5
FV-JDG-1-200-220V	6W/220V	210	195*36	长: 可变距, 宽: 4孔可选	Φ5.5
FV-JDG-1-300-220V	10W/220V	310	295*36	长: 可变距, 宽: 4孔可选	Φ5.5
FV-JDG-1-400-220V	12W/220V	410	395*36	长: 可变距, 宽: 4孔可选	Φ5.5
FV-JDG-1-500-220V	16W/220V	510	495*36	长: 可变距, 宽: 4孔可选	Φ5.5
FV-JDG-1-600-220V	20W/220V	610	595*36	长: 可变距, 宽: 4孔可选	Φ5.5
FV-JDG-1-900-220V	30W/220V	910	895*36	长: 可变距, 宽: 4孔可选	Φ5.5

(注: 尺寸单位: mm)