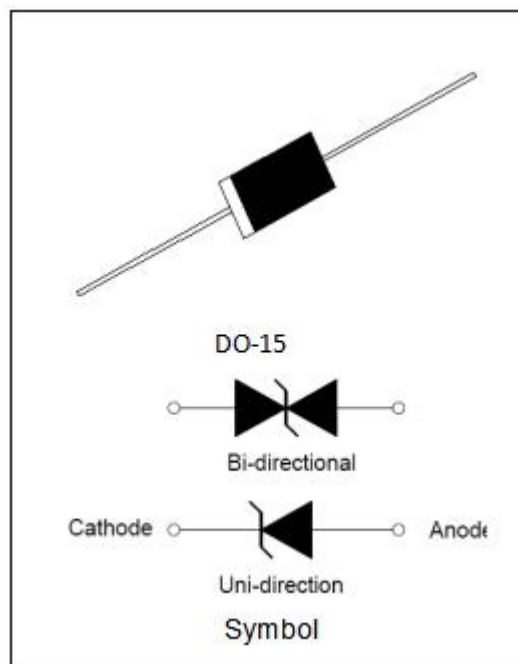


DESCRIPTION:

TVS diodes can be used in a wide range of applications which like consumer electronic products, automotive industries, munitions, telecommunications, aerospace industries, and intelligent control systems.

FEATURES:


- ✧ Glass passivated or planar junction.
- ✧ Lower clamping voltage.
- ✧ High temperature soldering: 260°C/10s at terminals.
- ✧ Plastic package has Underwriters Laboratory Flammability 94V-0.
- ✧ Fast response time: typically less than 1.0ps from 0V to VBR min.
- ✧ JEDEC DO-15/DO-204AC Molded Plastic.
- ✧ IEC61000-4-2 (ESD) ±30kV (air), ±30kV (contact).



ABSOLUTE MAXIMUM RATINGS (TA=25°C, RH=45%-75%, unless otherwise noted)

Parameter	Symbol	Value	Unit
Storage temperature range	T _{stg}	-55 to +150	°C
Operating junction temperature range	T _j	-55 to +150	°C
Peak pulse power dissipation on 10/1000µs waveform	P _{PP}	500	W

MARKING



Screen and model

ELECTRICAL CHARACTERISTICS (TA=25°C)

Part Number		V _R	I _R @V _R	V _{BR} @I _T		I _T	V _C @I _{PP}	I _{PP} ^①
Uni-Polar	Bi-Polar	V	μA	min(V)	max(V)	mA	max(V)	A
SA5.0A	SA5.0CA	5.0	600	6.40	7.00	10	9.2	55.4
SA6.0A	SA6.0CA	6.0	600	6.67	7.37	10	10.3	49.5
SA6.5A	SA6.5CA	6.5	400	7.22	7.98	10	11.2	45.5
SA7.0A	SA7.0CA	7.0	150	7.78	8.60	10	12.0	42.5
SA7.5A	SA7.5CA	7.5	50	8.33	9.21	1	12.9	39.5
SA8.0A	SA8.0CA	8.0	25	8.89	9.83	1	13.6	37.5
SA8.5A	SA8.5CA	8.5	10	9.44	10.40	1	14.4	35.5
SA9.0A	SA9.0CA	9.0	5	10.00	11.10	1	15.4	33.1
SA10A	SA10CA	10.0	1	11.10	12.30	1	17.0	30.0
SA11A	SA11CA	11.0	1	12.20	13.50	1	18.2	28.0
SA12A	SA12CA	12.0	1	13.30	14.70	1	19.9	25.6
SA13A	SA13CA	13.0	1	14.40	15.90	1	21.5	23.7
SA14A	SA14CA	14.0	1	15.60	17.20	1	23.2	22.0
SA15A	SA15CA	15.0	1	16.70	18.50	1	24.4	20.9
SA16A	SA16CA	16.0	1	17.80	19.70	1	26.0	19.6
SA17A	SA17CA	17.0	1	18.90	20.90	1	27.6	18.5
SA18A	SA18CA	18.0	1	20.00	22.10	1	29.2	17.5
SA20A	SA20CA	20.0	1	22.20	24.50	1	32.4	15.7
SA22A	SA22CA	22.0	1	24.40	26.90	1	35.5	14.4
SA24A	SA24CA	24.0	1	26.70	29.50	1	38.9	13.1
SA26A	SA26CA	26.0	1	28.90	31.90	1	42.1	12.1
SA28A	SA28CA	28.0	1	31.10	34.40	1	45.4	11.2
SA30A	SA30CA	30.0	1	33.30	36.80	1	48.4	10.5
SA33A	SA33CA	33.0	1	36.70	40.60	1	53.3	9.6
SA36A	SA36CA	36.0	1	40.00	44.20	1	58.1	8.8
SA40A	SA40CA	40.0	1	44.40	49.10	1	64.5	7.9
SA43A	SA43CA	43.0	1	47.80	52.80	1	69.4	7.3
SA45A	SA45CA	45.0	1	50.00	55.30	1	72.7	7.0
SA48A	SA48CA	48.0	1	53.30	58.90	1	77.4	6.6
SA51A	SA51CA	51.0	1	56.70	62.70	1	82.4	6.2

ELECTRICAL CHARACTERISTICS (TA=25°C, continued)

Part Number		V _R	I _R @V _R	V _{BR} @I _T		I _T	V _C @I _{PP}	I _{PP} ^①
Uni-Polar	Bi-Polar	V	μA	min(V)	max(V)	mA	max(V)	A
SA54A	SA54CA	54.0	1	60.00	66.30	1	87.1	5.9
SA58A	SA58CA	58.0	1	64.40	71.20	1	93.6	5.4
SA60A	SA60CA	60.0	1	66.70	73.70	1	96.8	5.3
SA64A	SA64CA	64.0	1	71.10	78.60	1	103.0	5.0
SA70A	SA70CA	70.0	1	77.80	86.00	1	113.0	4.5
SA75A	SA75CA	75.0	1	83.30	92.10	1	121.0	4.2
SA78A	SA78CA	78.0	1	86.70	95.80	1	126.0	4.0
SA85A	SA85CA	85.0	1	94.40	104.0	1	137.0	3.7
SA90A	SA90CA	90.0	1	100.0	111.0	1	146.0	3.5
SA100A	SA100CA	100.0	1	100.0	111.0	1	162.0	3.1
SA110A	SA110CA	110.0	1	111.0	123.0	1	177.0	2.9
SA120A	SA120CA	120.0	1	122.0	135.0	1	193.0	2.6
SA130A	SA130CA	130.0	1	133.0	147.0	1	209.0	2.4
SA150A	SA150CA	150.0	1	144.0	159.0	1	243.0	2.1
SA160A	SA160CA	160.0	1	167.0	185.0	1	259.0	2.0
SA170A	SA170CA	170.0	1	178.0	197.0	1	275.0	1.9
SA180A	SA180CA	180.0	1	189.0	209.0	1	292.0	1.7
SA200A	SA200CA	200.0	1	201.0	222.0	1	324.0	1.5
SA220A	SA220CA	220.0	1	211.0	234.0	1	356.0	1.4

① Surge waveform: 10/1000μs

V_R : Stand-off Voltage -- Maximum voltage that can be applied

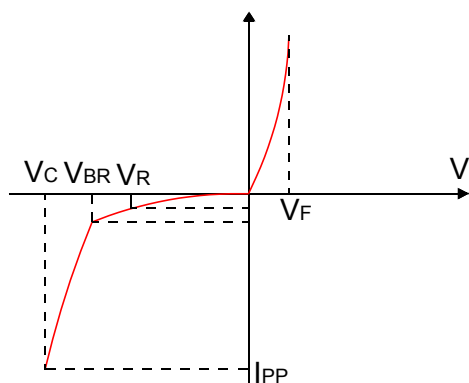
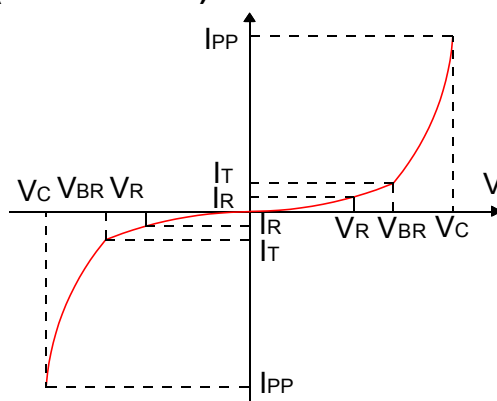
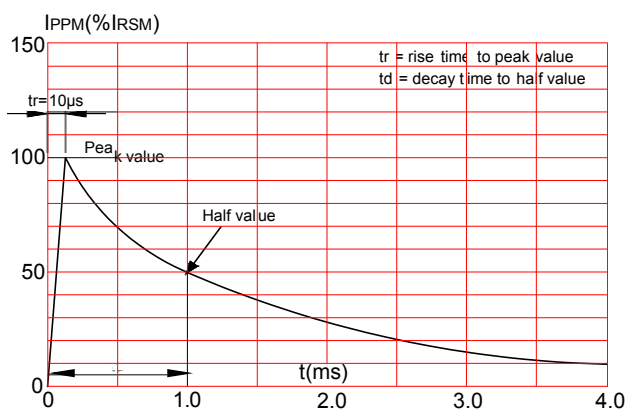
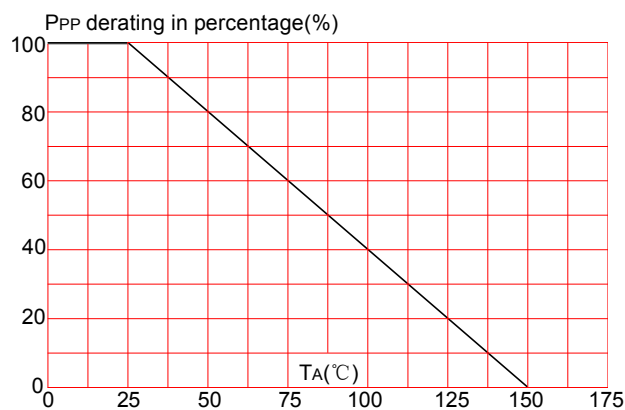
V_{BR}: Breakdown Voltage

V_C: Clamping Voltage -- Peak voltage measured across the suppressor at a specified I_{pp}

I_R: Reverse Leakage Current

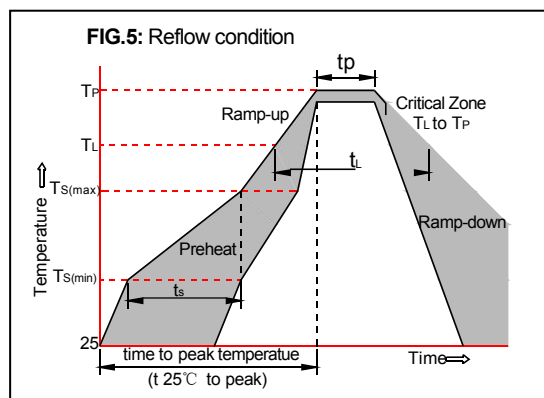
ORDERING INFORMATION

SA 500W SA Series V_R Voltage	XX	C C: Bi-directional	A 5% V_{BR} Voltage tolerance
--	------------------	--	---

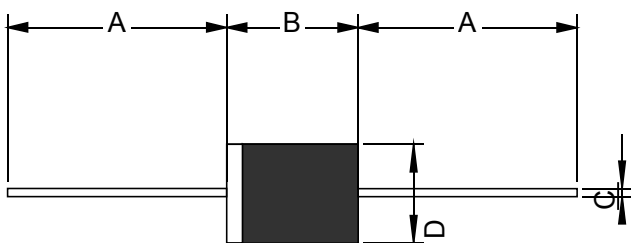
RATINGS AND V - I CHARACTERISTICS CURVES ($T_A=25^\circ\text{C}$)
FIG.1:V- I curve characteristics (Uni-directional)

FIG.2:V- I curve characteristics (Bi-directional)

FIG.3: Pulse waveform

FIG.4: Pulse derating curve


SOLDERING PARAMETERS

Reflow Condition		Pb-Free assembly (see FIG.5)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150°C
	-Temperature Max($T_{s(max)}$)	+200°C
	-Time (Min to Max) (t_s)	60-180 secs.
Average ramp up rate (Liquid us Temp (T_L) to peak)		3°C/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature(T_L)(Liquid us)	+217°C
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_P)		+260(+0/-5)°C
Time within 5°C of actual Peak Temp (t_p)		30 secs. Max
Ramp-down Rate		6°C/sec. Max
Time 25°C to Peak Temp (T_P)		8 min. Max
Do not exceed		+260°C



PACKAGE MECHANICAL DATA



Ref.	Dimensions			
	Inches		Millimeters	
	Min.	Max.	Min.	Max.
A	1.000	-	25.40	-
B	0.228	0.300	5.80	7.62
C	0.027	0.035	0.69	0.89
D	0.118	0.140	3.00	3.60