


HTCC陶瓷专业定制



开关型氧传感器
SWITCH -TYPE OXYGEN SENSOR

UHS2100

摩托车开关氧 FOR MOTORCYCLE

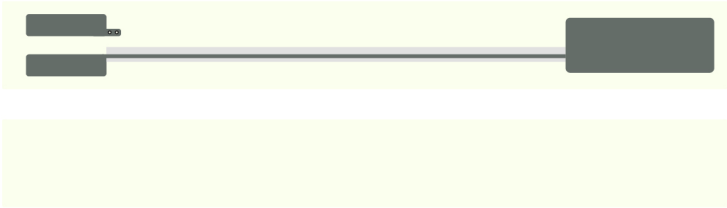

长	宽	厚	抗弯强度		传感器类型	燃油相容性
38.5±0.5mm	4.2±0.25mm	1.2±0.15mm	≧600Mpa		摩托车用, 开关型	汽油
Length	Width	Thickness	Strength		Sensor type	Fuel compatibility
38.5±0.5mm	4.2±0.25mm	1.2±0.15mm	≧600Mpa		lambda sensor @motorcycle	gasoline

≥600
MPa

抗弯强度
Bending strength

±20°C

传感器稳态温度@室温环境
Steady state temperature @ room temperature environment



使用寿命长, 可靠性高
Long life and high reliability



信号稳定性强, 一致性高
Strong signal stability and high consistency



抗弯强度高, 总成压装适应性高, 断裂失效率低
High bending strength, high assembly press fit adaptability and low fracture failure rate

气氛台测试性能

ATMOSPHERE STATION TEST PERFORMANCE

起燃时间 | ≤10s@12V
THE LIGHT-OFF TIME

响应特性
RESPONSE CHARACTERISTICS

废气温度	450°C
浓燃电压	≥720mV
稀燃电压	≤100mV
响应时间浓~稀	≤250ms
响应时间	≤150ms